


# Digital Signage





## Digital Signage Advertising Kiosk

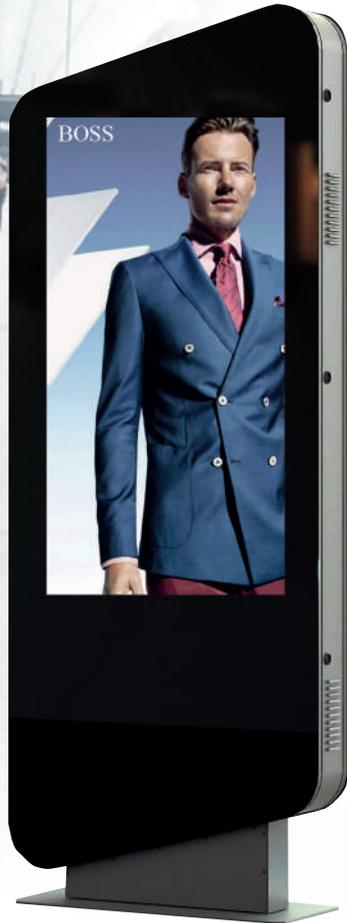

## Digital Signage Advertising Kiosk

Informative, interactive and content-rich advertising kiosk to bolster user-experience.

### Main features

- Touch and non-touch option
- Free-standing design with option to bolt down base plate
- Power & data feed from rear panel or through the base plate
- Anti-Glare protection glass over the screen
- Key lockable access service doore
- Ergonomic and compact structure,



**Smart Design**  
The sleek look is achieved with a striking aluminium surround and edge-to-edge vandal proof tempered glass front panel



**Integrated Signage Media Player**  
powered by Samsung MagicInfo S4 Tizen



**Built in Wi-Fi**  
Connect the screen to the CMS wirelessly via the integrated Wi-Fi, ethernet or by LAN



**Plug and Play**  
If there is no internet access available the screen can still be updated thanks to their backup USB update option.



**24/7 Commercial Use**  
A commercial grade panel, with a lifespan of 50,000 hours and high quality compenents ensure that this display can be in constant use 24/7.



Screen Size	32"	43"	49"	55"
Model Number	T32TR	T43TR	T49TR	T55TR

### Technical Specifications

#### Screen

Screen Size	32" 43" 49" 55"
Resolution	32" 1920x1080 - 43" 49" 55" 4K
Brightness	450 cd/m2
Aspect Ratio	16:9
Contrast Ratio	5000:1
Viewing Angle	178:178
Response Time	8ms

#### Signage Media Player

Player	Built-in MagicInfo S6, SSSP 6.0
Processor	Coretex A72 1.7GHz Quad-Core CPU
Memory	2.5GB LPDDR4 1.5GHz 64bit
Operating System	Tizen 4.0 (VDLinux)

#### Other

Application	Indoor
Colour	Black (optional)
Installation	Floor bolting / Free Standing
Enclosure	Metal
Working temperature	0°C~50°C
Power supply	AC 100-240V 50/60HZ

# VENUS



## Digital Signage Advertising Kiosk

Inform and guide your audience while delivering confidence and corporate messaging at the same time

### Main features

- Touch and non-touch option
- Free-standing design with option to bolt down base plate
- Power & data feed from rear panel or through the base plate
- Anti-Glare protection glass over the screen
- Key lockable access service door
- Ergonomic and compact structure,



**Smart Design**  
The sleek look is achieved with a striking aluminium surround and edge-to-edge vandal proof tempered glass front panel



**Integrated Signage Media Player**  
powered by Samsung MagicInfo S4 Tizen



**Built in Wi-Fi**  
Connect the screen to the CMS wirelessly via the integrated Wi-Fi, ethernet or by LAN



**Plug and Play**  
If there is no internet access available the screen can still be updated thanks to their backup USB update option.



**24/7 Commercial Use**  
A commercial grade panel, with a lifespan of 50,000 hours and high quality components ensure that this display can be in constant use 24/7.



Screen Size	32"	43"	49"	55"
Model Number	T32VE	T43VE	T49VE	T55VE

### Technical Specifications

#### Screen

Screen Size	32" 43" 49" 55"
Resolution	32" 1920x1080 - 43" 49" 55" 4K
Brightness	450 cd/m2
Aspect Ratio	16:9
Contrast Ratio	5000:1
Viewing Angle	178:178
Response Time	8ms

#### Signage Media Player

Player	Built-in MagicInfo S6, SSSP 6.0
Processor	Coretex A72 1.7GHz Quad-Core CPU
Memory	2.5GB LPDDR4 1.5GHz 64bit
Operating System	Tizen 4.0 (VDLinux)

#### Other

Application	Indoor
Colour	White (optional)
Installation	Floor bolting / Free Standing
Enclosure	Metal
Working temperature	0°C~50°C
Power supply	AC 100-240V 50/60HZ



## Digital Signage Advertising Kiosk

Supreme quality that ensures 24/7 continuous use without any interruption

### Main features

- Touch and non-touch option
- Free-standing design with option to bolt down base plate
- Power & data feed from rear panel or through the base plate
- Anti-Glare protection glass over the screen
- Key lockable access service door
- Ergonomic and compact structure,



**Smart Design**  
The sleek look is achieved with a striking aluminium surround and edge-to-edge vandal proof tempered glass front panel



**Integrated Signage Media Player**  
powered by Samsung MagicInfo S4 Tizen



**Built in Wi-Fi**  
Connect the screen to the CMS wirelessly via the integrated Wi-Fi, ethernet or by LAN



**Plug and Play**  
If there is no internet access available the screen can still be updated thanks to their backup USB update option.



**24/7 Commercial Use**  
A commercial grade panel, with a lifespan of 50,000 hours and high quality components ensure that this display can be in constant use 24/7.



### Technical Specifications

#### Screen

Screen Size	49" T49MN5
Resolution	1920x1080
Brightness	450 cd/m2
Aspect Ratio	16:9
Contrast Ratio	5000:1
Viewing Angle	178:178
Response Time	8ms

#### Signage Media Player

Player	Built-in MagicInfo S6, SSSP 6.0
Processor	Coretex A72 1.7GHz Quad-Core CPU
Memory	2.5GB LPDDR4 1.5GHz 64bit
Operating System	Tizen 4.0 (VDLinux)

#### Other

Application	indoor
Colour	Black (optional)
Installation	Floor bolting / Free Standing
Enclosure	Metal
Working temperature	0°C~50°C
Power supply	AC 100-240V 50/60HZ



## Digital Signage Advertising Kiosk

Perfect solution for providing customer engagement, information and for promoting latest products and services

### Main features

- Touch and non-touch option
- Single or Dual Sided Screen option
- Power & data feed from rear panel or through the base plate
- Anti-Glare protection glass over the screen
- Key lockable access service doore
- Ergonomic and compact structure,



**Smart Design**  
The sleek look is achieved with a striking aluminium surround and edge-to-edge vandal proof tempered glass front panel



**Integrated Signage Media Player**  
powered by Samsung MagicInfo S4 Tizen



**Built in Wi-Fi**  
Connect the screen to the CMS wirelessly via the integrated Wi-Fi, ethernet or by LAN



**Plug and Play**  
If there is no internet access available the screen can still be updated thanks to their backup USB update option.



**24/7 Commercial Use**  
A commercial grade panel, with a lifespan of 50,000 hours and high quality compenents ensure that this display can be in constant use 24/7.



Screen Size	32"	43"	49"	55"	65"
Model Number	T32LU	T43LU	T49LU	T55LU	T65LU

### Technical Specifications

#### Screen

Screen Size	32" 43" 49" 55" 65"
Resolution	32" 1920x1080 - 43" 49" 55" 65" 4K
Brightness	450 cd/m2
Aspect Ratio	16:9
Contrast Ratio	5000:1
Viewing Angle	178:178
Response Time	8ms

#### Signage Media Player

Player	Built-in MagicInfo S6, SSSP 6.0
Processor	Coretex A72 1.7GHz Quad-Core CPU
Memory	2.5GB LPDDR4 1.5GHz 64bit
Operating System	Tizen 4.0 (VDLinux)

#### Other

Application	Indoor
Colour	Black (optional)
Installation	Free Standing
Enclosure	Metal
Working temperature	0°C~50°C
Power supply	AC 100-240V 50/60HZ



## Digital Signage Advertising Kiosk

Klera is the right solution to inform your audience and help deliver a powerful message

### Main features

- Touch and non-touch option
- Free-standing design with option to bolt down base plate
- Power & data feed from rear panel or through the base plate
- Anti-Glare protection glass over the screen
- Key lockable access service doore
- Ergonomic and compact structure,



#### Smart Design

The sleek look is achieved with a striking aluminium surround and edge-to-edge vandal proof tempered glass front panel



#### Integrated Signage Media Player

powered by Samsung MagicInfo S4 Tizen



#### Built in Wi-Fi

Connect the screen to the CMS wirelessly via the integrated Wi-Fi, ethernet or by LAN



#### Plug and Play

If there is no internet access available the screen can still be updated thanks to their backup USB update option.



#### 24/7 Commercial Use

A commercial grade panel, with a lifespan of 50,000 hours and high quality compenens ensure that this display can be in constant use 24/7.



### Technical Specifications

#### Screen

Screen Size	32" T32KL	43" T43KL
Resolution	1920x1080	
Brightness	450 cd/m2	
Aspect Ratio	16:9	
Contrast Ratio	5000:1	
Viewing Angle	178:178	
Response Time	8ms	

#### Signage Media Player

Player	Built-in MagicInfo S6, SSSP 6.0
Processor	Coretex A72 1.7GHz Quad-Core CPU
Memory	2.5GB LPDDR4 1.5GHz 64bit
Operating System	Tizen 4.0 (VDLinux)

#### Other

Application	indoor
Colour	Black (optional)
Installation	Floor bolting / Free Standing
Enclosure	Metal
Working temperature	0°C~50°C
Power supply	AC 100-240V 50/60HZ



## Interactive Kiosk



## Interactive Touch Screen Kiosk

A perfect stand-alone interactive kiosk that provides an incredible user experience

### Main features

- Free-standing design with option to bolt down base plate
- Power & data feed from rear panel or floor through the base plate
- Anti-Glare protection glass over the screen
- Key lockable access service door
- Ergonomic and compact structure, user friendly, easy for maintenance



#### Touch technology - Capacitive

The Projective Capacitive (PCAP) touch technology with 12 touch points ensures a seamless and accurate touch response. With its AMVA3 LED panel, it offers exceptional colour performance, high contrast and wide viewing angles.

This technology uses a sensor-grid of micro-fine wires integrated into the glass that covers the screen. Touch is detected because electrical characteristics of the sensor grid change when human finger is placed on the glass. Thanks to the glass overlay this technology is highly durable, and the touch function remains unaffected even if the glass is scratched.

It offers perfect picture performance and will work with human finger (also latex gloved) and stylus-pen.



#### Smart Design

The sleek look is achieved with a striking aluminium surround and edge-to-edge vandal proof tempered glass front panel



#### Plug and Play

If there is no internet access available the screen can still be updated thanks to their backup USB update option.



#### 24/7 Commercial Use

A commercial grade panel, with a lifespan of 50.000 hours and high quality compenets ensure that this display can be in constant use 24/7.



Screen Size	32"	43"	49"
Model Number	K32SN	K43SN	K49SN

### Technical Specifications

#### Screen

Screen Size	32" 43" 49"
Resolution	1920x1080
Brightness	450 cd/m2
Aspect Ratio	16:9
Contrast Ratio	5000:1
Viewing Angle	178:178
Response Time	8ms

#### Touch

Touch Technology	PCAP - Projected Capacitive
Touch Points	Multi Touch
Responce Time	8 ms
OS	Windows, Linux
Protection Glass	Tempered Anti Glare
Touch interface	USB
Touch method	finger, stylus, glove (latex)

#### Other

Application	Indoor
Colour	Black & White
Installation	Floor bolting / Free Standing
Enclosure	Metal
Working temperature	0°C~50°C
Power supply	AC 100-240V 50/60HZ

# ASTORIA



## Interactive Touch Screen Kiosk

Designed with a unique mix of stylish curves with LED lighted side bars, accurate and responsive projected capacitive touch for a great user experience

### Main features

- Projected capacitive (PCAP) 10-point multi-touch
- Anti-Glare protection glass over the screen
- Holes in base for mounting into the floor
- Sleek and modern design
- Power & data feed from rear panel or floor through the base plate
- Key lockable access service door
- LED lighted side bar with RGB options



### Touch technology - Capacitive

The Projective Capacitive (PCAP) touch technology with 12 touch points ensures a seamless and accurate touch response. With its AMVA3 LED panel, it offers exceptional colour performance, high contrast and wide viewing angles.

This technology uses a sensor-grid of micro-fine wires integrated into the glass that covers the screen. Touch is detected because electrical characteristics of the sensor grid change when human finger is placed on the glass. Thanks to the glass overlay this technology is highly durable, and the touch function remains unaffected even if the glass is scratched.

It offers perfect picture performance and will work with human finger (also latex gloved) and stylus-pen.



### Smart Design

The sleek look is achieved with a striking aluminium surround and edge-to-edge vandal proof tempered glass front panel



### Plug and Play

If there is no internet access available the screen can still be updated thanks to their backup USB update option.



### 24/7 Commercial Use

A commercial grade panel, with a lifespan of 50.000 hours and high quality compenets ensure that this display can be in constant use 24/7.



Screen Size	32"	43"	49"	55"
Model Number	K32AS	K43AS	K49AS	K55AS

### Technical Specifications

#### Screen

Screen Size	32" 43" 49" 55"
Resolution	1920x1080
Brightness	450 cd/m2
Aspect Ratio	16:9
Contrast Ratio	5000:1
Viewing Angle	178:178
Response Time	8ms

#### Touch

Touch Technology	PCAP - Projected Capacitive
Touch Points	Multi Touch
Responce Time	8 ms
OS	Windows, Linux
Protection Glass	Tempered Anti Glare
Touch interface	USB
Touch method	finger, stylus, glove (latex)

#### Other

Application	Indoor
Colour	Black & White
Installation	Floor bolting / Free Standing
Enclosure	Metal
Working temperature	0°C~50°C
Power supply	AC 100-240V 50/60HZ



## Interactive Touch Screen Kiosk

## Optimise user experience with an ergonomic angled screen

### Main features

- Free-standing design with option to bolt down base plate
- Power & data feed from rear panel or floor through the base plate
- Anti-Glare protection glass over the screen
- Key lockable access service door
- Ergonomic and compact structure, User friendly, easy for maintenance



### Touch technology - Capacitive

The Projective Capacitive (PCAP) touch technology with 12 touch points ensures a seamless and accurate touch response. With its AMVA3 LED panel, it offers exceptional colour performance, high contrast and wide viewing angles.

This technology uses a sensor-grid of micro-fine wires integrated into the glass that covers the screen. Touch is detected because electrical characteristics of the sensor grid change when human finger is placed on the glass. Thanks to the glass overlay this technology is highly durable, and the touch function remains unaffected even if the glass is scratched.

It offers perfect picture performance and will work with human finger (also latex gloved) and stylus-pen.



### Smart Design

The sleek look is achieved with a striking aluminium surround and edge-to-edge vandal proof tempered glass front panel



### Plug and Play

If there is no internet access available the screen can still be updated thanks to their backup USB update option.



### 24/7 Commercial Use

A commercial grade panel, with a lifespan of 50,000 hours and high quality compenets ensure that this display can be in constant use 24/7.



Screen Size	32"	43"	49"	55"
Model Number	K32VN	K43VN	K49VN	K55VN

### Technical Specifications

#### Screen

Screen Size	32" 43" 49" 55"
Resolution	1920x1080
Brightness	450 cd/m2
Aspect Ratio	16:9
Contrast Ratio	5000:1
Viewing Angle	178:178
Response Time	8ms

#### Touch

Touch Technology	PCAP - Projected Capacitive
Touch Points	Multi Touch
Responce Time	8 ms
OS	Windows, Linux
Protection Glass	Tempered Anti Glare
Touch interface	USB
Touch method	finger, stylus, glove (latex)

#### Other

Application	Indoor
Colour	Black & White
Installation	Floor bolting / Free Standing
Enclosure	Metal
Working temperature	0°C~50°C
Power supply	AC 100-240V 50/60HZ

# TIERRA



## Interactive Touch Screen Kiosk

Perfect for reception areas where users can get 'hands on' with Tierra touch screen kiosk

### Main features

- Free-standing design with option to bolt down base plate
- Power & data feed from rear panel or floor through the base plate
- Anti-Glare protection glass over the screen
- Key lockable access service door
- Ergonomic and compact structure
- User friendly, easy for maintenance



### Touch technology - Capacitive

The Projective Capacitive (PCAP) touch technology with 12 touch points ensures a seamless and accurate touch response. With its AMVA3 LED panel, it offers exceptional colour performance, high contrast and wide viewing angles.

This technology uses a sensor-grid of micro-fine wires integrated into the glass that covers the screen. Touch is detected because electrical characteristics of the sensor grid change when human finger is placed on the glass. Thanks to the glass overlay this technology is highly durable, and the touch function remains unaffected even if the glass is scratched.

It offers perfect picture performance and will work with human finger (also latex gloved) and stylus-pen.



### Smart Design

The sleek look is achieved with a striking aluminium surround and edge-to-edge vandal proof tempered glass front panel



### Plug and Play

If there is no internet access available the screen can still be updated thanks to their backup USB update option.



### 24/7 Commercial Use

A commercial grade panel, with a lifespan of 50,000 hours and high quality compenets ensure that this display can be in constant use 24/7.



### Technical Specifications

#### Screen

Screen Size	27" K27TE 32" K32TE
Resolution	1920x1080
Brightness	450 cd/m2
Aspect Ratio	16:9
Contrast Ratio	5000:1
Viewing Angle	178:178
Response Time	8ms

#### Touch

Touch Technology	PCAP - Projected Capacitive
Touch Points	Multi Touch
Responce Time	8 ms
OS	Windows, Linux
Protection Glass	Tempered Anti Glare
Touch interface	USB
Touch method	finger, stylus, glove (latex)

#### Other

Application	Indoor
Colour	RAL 7047 Grey (optional)
Installation	Floor bolting / Free Standing
Enclosure	Metal
Working temperature	0°C~50°C
Power supply	AC 100-240V 50/60HZ



## Interactive Touch Screen Kiosk

Increase the satisfaction of your customers or visitors with a wayfinding kiosk in your business

### Main features

- Free-standing design with option to bolt down base plate
- Power & data feed from rear panel or floor through the base plate
- Anti-Glare protection glass over the screen
- Key lockable access service door
- Ergonomic and compact structure
- User friendly, easy for maintenance



### Touch technology - Capacitive

The Projective Capacitive (PCAP) touch technology with 12 touch points ensures a seamless and accurate touch response. With its AMVA3 LED panel, it offers exceptional colour performance, high contrast and wide viewing angles.

This technology uses a sensor-grid of micro-fine wires integrated into the glass that covers the screen. Touch is detected because electrical characteristics of the sensor grid change when human finger is placed on the glass. Thanks to the glass overlay this technology is highly durable, and the touch function remains unaffected even if the glass is scratched.

It offers perfect picture performance and will work with human finger (also latex gloved) and stylus-pen.



### Smart Design

The sleek look is achieved with a striking aluminium surround and edge-to-edge vandal proof tempered glass front panel



### Plug and Play

If there is no internet access available the screen can still be updated thanks to their backup USB update option.



### 24/7 Commercial Use

A commercial grade panel, with a lifespan of 50.000 hours and high quality compenents ensure that this display can be in constant use 24/7.



### Technical Specifications

#### Screen

Screen Size	32" K32VR 43" K43VR
Resolution	1920x1080
Brightness	450 cd/m2
Aspect Ratio	16:9
Contrast Ratio	5000:1
Viewing Angle	178:178
Response Time	8ms

#### Touch

Touch Technology	PCAP - Projected Capacitive
Touch Points	Multi Touch
Responce Time	8 ms
OS	Windows, Linux
Protection Glass	Tempered Anti Glare
Touch interface	USB
Touch method	finger, stylus, glove (latex)

#### Other

Application	Indoor
Colour	RAL 7047 Grey (optional)
Installation	Floor bolting / Free Standing
Enclosure	Metal
Working temperature	0°C~50°C
Power supply	AC 100-240V 50/60HZ

# ZETA



## Interactive Touch Screen Kiosk

Transform your business by Zeta interactive kiosk, improve communications and operational efficiency.

### Main features

- Free-standing design with option to bolt down base plate
- Power & data feed from rear panel or floor through the base plate
- Anti-Glare protection glass over the screen
- Key lockable access service door
- Ergonomic and compact structure
- User friendly, easy for maintenance



### Touch technology - Capacitive

The Projective Capacitive (PCAP) touch technology with 12 touch points ensures a seamless and accurate touch response. With its AMVA3 LED panel, it offers exceptional colour performance, high contrast and wide viewing angles.

This technology uses a sensor-grid of micro-fine wires integrated into the glass that covers the screen. Touch is detected because electrical characteristics of the sensor grid change when human finger is placed on the glass. Thanks to the glass overlay this technology is highly durable, and the touch function remains unaffected even if the glass is scratched.

It offers perfect picture performance and will work with human finger (also latex gloved) and stylus-pen.



### Smart Design

The sleek look is achieved with a striking aluminium surround and edge-to-edge vandal proof tempered glass front panel



### Plug and Play

If there is no internet access available the screen can still be updated thanks to their backup USB update option.



### 24/7 Commercial Use

A commercial grade panel, with a lifespan of 50.000 hours and high quality compenents ensure that this display can be in constant use 24/7.



### Technical Specifications

#### Screen

Screen Size	32" K32ZE
Resolution	1920x1080
Brightness	450 cd/m2
Aspect Ratio	16:9
Contrast Ratio	5000:1
Viewing Angle	178:178
Response Time	8ms

#### Touch

Touch Technology	PCAP - Projected Capacitive
Touch Points	Multi Touch
Responce Time	8 ms
OS	Windows, Linux
Protection Glass	Tempered Anti Glare
Touch interface	USB
Touch method	finger, stylus, glove (latex)

#### Other

Application	Indoor
Colour	Black
Installation	Floor bolting / Free Standing
Enclosure	Metal
Working temperature	0°C~50°C
Power supply	AC 100-240V 50/60HZ

# FLORA



## Interactive Touch Screen Kiosk

Interact with technology in new ways. Change the face of customer service

### Main features

- Free-standing design with option to bolt down base plate
- Power & data feed from rear panel or floor through the base plate
- Vertical orientation
- Key lockable access service door
- Ergonomic and compact structure
- Optional colour



### Touch technology - Capacitive

The Projective Capacitive (PCAP) touch technology with 12 touch points ensures a seamless and accurate touch response. With its AMVA3 LED panel, it offers exceptional colour performance, high contrast and wide viewing angles.

This technology uses a sensor-grid of micro-fine wires integrated into the glass that covers the screen. Touch is detected because electrical characteristics of the sensor grid change when human finger is placed on the glass. Thanks to the glass overlay this technology is highly durable, and the touch function remains unaffected even if the glass is scratched.

It offers perfect picture performance and will work with human finger (also latex gloved) and stylus-pen.



### Smart Design

The sleek look is achieved with a striking aluminium surround and edge-to-edge vandal proof tempered glass front panel



### Plug and Play

If there is no internet access available the screen can still be updated thanks to their backup USB update option.



### 24/7 Commercial Use

A commercial grade panel, with a lifespan of 50,000 hours and high quality components ensure that this display can be in constant use 24/7.



### Technical Specifications

#### Screen

Screen Size	27" K27FV 32" K32FV
Screen Orientation	Vertical
Resolution	1920x1080
Brightness	450 cd/m2
Aspect Ratio	16:9
Viewing Angle	178:178
Response Time	8ms

#### Touch

Touch Technology	PCAP - Projected Capacitive
Touch Points	Multi Touch
Response Time	8 ms
OS	Windows, Linux
Protection Glass	Tempered Anti Glare
Touch interface	USB
Touch method	finger, stylus, glove (latex)

#### Other

Application	indoor
Colour	Red
Installation	Floor bolting / Free Standing
Enclosure	Metal
Working temperature	0°C~50°C
Power supply	AC 100-240V 50/60HZ

# STELLA



## Interactive Touch Screen Kiosk

## Perfect turn-key solutions for any kind of application

### Main features

- Free-standing design with option to bolt down base plate
- Power & data feed from rear panel or floor through the base plate
- Vertical orientation
- Key lockable access service door
- Ergonomic and compact structure
- Option colour



### Touch technology - Capacitive

The Projective Capacitive (PCAP) touch technology with 12 touch points ensures a seamless and accurate touch response. With its AMVA3 LED panel, it offers exceptional colour performance, high contrast and wide viewing angles.

This technology uses a sensor-grid of micro-fine wires integrated into the glass that covers the screen. Touch is detected because electrical characteristics of the sensor grid change when human finger is placed on the glass. Thanks to the glass overlay this technology is highly durable, and the touch function remains unaffected even if the glass is scratched.

It offers perfect picture performance and will work with human finger (also latex gloved) and stylus-pen.



### Smart Design

The sleek look is achieved with a striking aluminium surround and edge-to-edge vandal proof tempered glass front panel



### Plug and Play

If there is no internet access available the screen can still be updated thanks to their backup USB update option.



### 24/7 Commercial Use

A commercial grade panel, with a lifespan of 50.000 hours and high quality compenets ensure that this display can be in constant use 24/7.



### Technical Specifications

#### Screen

Screen Size	27" K27SV 32" K32SV
Screen Orientation	Vertical
Resolution	1920x1080
Brightness	450 cd/m2
Aspect Ratio	16:9
Viewing Angle	178:178
Response Time	8ms

#### Touch

Touch Technology	PCAP - Projected Capacitive
Touch Points	Multi Touch
Response Time	8 ms
OS	Windows, Linux
Protection Glass	Tempered Anti Glare
Touch interface	USB
Touch method	finger, stylus, glove (latex)

#### Other

Application	indoor
Colour	RAL 7047 Grey (optional)
Installation	Floor bolting / Free Standing
Enclosure	Metal
Working temperature	0°C~50°C
Power supply	AC 100-240V 50/60HZ



Interactive Touch Screen Kiosk

Let your visitors know exactly what they want to know, where they are and where they need to go

### Main features

- Projected capacitive (PCAP) 10-point multi-touch
- Single or Dual Sided Screen option
- Free-standing design with option to bolt down base plate
- Power & data feed from rear panel or floor through the base plate
- Key lockable access service door
- Ergonomic and compact structure
- User friendly, easy for maintenance



#### Touch technology - Capacitive

The Projective Capacitive (PCAP) touch technology with 12 touch points ensures a seamless and accurate touch response. With its AMVA3 LED panel, it offers exceptional colour performance, high contrast and wide viewing angles.

This technology uses a sensor-grid of micro-fine wires integrated into the glass that covers the screen. Touch is detected because electrical characteristics of the sensor grid change when human finger is placed on the glass. Thanks to the glass overlay this technology is highly durable, and the touch function remains unaffected even if the glass is scratched.

It offers perfect picture performance and will work with human finger (also latex gloved) and stylus-pen.



#### Smart Design

The sleek look is achieved with a striking aluminium surround and edge-to-edge vandal proof tempered glass front panel



#### Plug and Play

If there is no internet access available the screen can still be updated thanks to their backup USB update option.



#### 24/7 Commercial Use

A commercial grade panel, with a lifespan of 50,000 hours and high quality components ensure that this display can be in constant use 24/7.



Screen Size	32"	43"	49"	55"
Model Number	T32TR-T	T43TR-T	T49TR-T	T55TR-T

### Technical Specifications

#### Screen

Screen Size	32" 43" 49" 55"
Resolution	32" 1920x1080 - 43" 49" 55" 4K
Brightness	450 cd/m2
Aspect Ratio	16:9
Contrast Ratio	5000:1
Viewing Angle	178:178
Response Time	8ms

#### Touch

Touch Technology	PCAP - Projected Capacitive
Touch Points	Multi Touch
Response Time	8 ms
OS	Windows, Linux
Protection Glass	Tempered Anti Glare
Touch interface	USB
Touch method	finger, stylus, glove (latex)

#### Other

Application	Indoor
Colour	RAL 7047 Grey (optional)
Installation	Floor bolting / Free Standing
Enclosure	Metal
Working temperature	0°C~50°C
Power supply	AC 100-240V 50/60HZ

# VENUS



Interactive Touch Screen Kiosk

Inform and guide your audience while delivering confidence and corporate messaging at the same time

### Main features

- Projected capacitive (PCAP) 10-point multi-touch
- Single or Dual Sided Screen option
- Free-standing design with option to bolt down base plate
- Power & data feed from rear panel or floor through the base plate
- Key lockable access service door
- Ergonomic and compact structure
- User friendly, easy for maintenance



#### Touch technology - Capacitive

The Projective Capacitive (PCAP) touch technology with 12 touch points ensures a seamless and accurate touch response. With its AMVA3 LED panel, it offers exceptional colour performance, high contrast and wide viewing angles.

This technology uses a sensor-grid of micro-fine wires integrated into the glass that covers the screen. Touch is detected because electrical characteristics of the sensor grid change when human finger is placed on the glass. Thanks to the glass overlay this technology is highly durable, and the touch function remains unaffected even if the glass is scratched.

It offers perfect picture performance and will work with human finger (also latex gloved) and stylus-pen.



#### Smart Design

The sleek look is achieved with a striking aluminium surround and edge-to-edge vandal proof tempered glass front panel



#### Plug and Play

If there is no internet access available the screen can still be updated thanks to their backup USB update option.



#### 24/7 Commercial Use

A commercial grade panel, with a lifespan of 50,000 hours and high quality components ensure that this display can be in constant use 24/7.



Screen Size	32"	43"	49"	55"
Model Number	T32VE-T	T43VE-T	T49VE-T	T55VE-T

### Technical Specifications

#### Screen

Screen Size	32" 43" 49" 55"
Resolution	32" 1920x1080 - 43" 49" 55" 4K
Brightness	450 cd/m2
Aspect Ratio	16:9
Contrast Ratio	5000:1
Viewing Angle	178:178
Response Time	8ms

#### Touch

Touch Technology	PCAP - Projected Capacitive
Touch Points	Multi Touch
Response Time	8 ms
OS	Windows, Linux
Protection Glass	Tempered Anti Glare
Touch interface	USB
Touch method	finger, stylus, glove (latex)

#### Other

Application	Indoor
Colour	RAL 7047 Grey (optional)
Installation	Floor bolting / Free Standing
Enclosure	Metal
Working temperature	0°C~50°C
Power supply	AC 100-240V 50/60HZ



## Interactive Touch Magic Mirror Kiosk

# VENUS MAGIC



## Interactive Touch Magic Mirror Kiosk

It is an ordinary Mirror until you switch on the screen. New concept of interactive touch kiosk solutions

### Main features

- Projected capacitive (PCAP) touch
- Built in High performance player PC
- Proximity sensor
- Free-standing design with option to bolt down base plate
- Power & data feed from rear panel or floor through the base plate
- Key lockable access service door User friendly, easy for maintenance
- 80% reflexivity rate



### Touch technology - Capacitive

The Projective Capacitive (PCAP) touch technology with 12 touch points ensures a seamless and accurate touch response. With its AMVA3 LED panel, it offers exceptional colour performance, high contrast and wide viewing angles.

This technology uses a sensor-grid of micro-fine wires integrated into the glass that covers the screen. Touch is detected because electrical characteristics of the sensor grid change when human finger is placed on the glass. Thanks to the glass overlay this technology is highly durable, and the touch function remains unaffected even if the glass is scratched.

It offers perfect picture performance and will work with human finger (also latex gloved) and stylus-pen.



### Smart Design

The sleek look is achieved with a striking aluminium surround and edge-to-edge vandal proof tempered glass front panel



### Plug and Play

If there is no internet access available the screen can still be updated thanks to their backup USB update option.



### 24/7 Commercial Use

A commercial grade panel, with a lifespan of 50.000 hours and high quality compenets ensure that this display can be in constant use 24/7.



Screen Size	43"	49"	55"
Model Number	G43VT	G49VT	G55VT

### Technical Specifications

#### Screen

Screen Size	43" 49" 55"
Resolution	4K
Brightness	450 cd/m2
Aspect Ratio	16:9
Response Time	8ms

#### Transparent Mirror

Thickness	4 mm
Dimensions	100 mm bezel in each side

#### PC

Intel i5 - 8 GB - 120 GB SSD - Windows 10 Pro
---

#### Touch

Touch Technology	PCAP - Projected Capacitive
Touch Points	Multi Touch
Response Time	8 ms
OS	Windows, Linux
Protection Glass	Tempered Anti Glare
Touch interface	USB
Touch method	finger, stylus, glove (latex)

#### Other

Application Type	Standalone
Cabinet Material	Metal
Application Area	Indoor

# MINERRA MAGIC



Interactive Touch Magic Mirror Kiosk

## Magic Mirror Interactive Touch Kiosk. Straight from science fiction

### Main features

- Projected capacitive (PCAP) touch
- Built in High performance player PC
- Proximity sensor
- Free-standing design with option to bolt down base plate
- Power & data feed from rear panel or floor through the base plate
- Key lockable access service door User friendly, easy for maintenance
- 80% reflexivity rate



### Touch technology - Capacitive

The Projective Capacitive (PCAP) touch technology with 12 touch points ensures a seamless and accurate touch response. With its AMVA3 LED panel, it offers exceptional colour performance, high contrast and wide viewing angles.

This technology uses a sensor-grid of micro-fine wires integrated into the glass that covers the screen. Touch is detected because electrical characteristics of the sensor grid change when human finger is placed on the glass. Thanks to the glass overlay this technology is highly durable, and the touch function remains unaffected even if the glass is scratched.

It offers perfect picture performance and will work with human finger (also latex gloved) and stylus-pen.



### Smart Design

The sleek look is achieved with a striking aluminium surround and edge-to-edge vandal proof tempered glass front panel



### Plug and Play

If there is no internet access available the screen can still be updated thanks to their backup USB update option.



### 24/7 Commercial Use

A commercial grade panel, with a lifespan of 50.000 hours and high quality compenets ensure that this display can be in constant use 24/7.



Screen Size	43"	49"	55"
Model Number	G43MT	G49MT	G55MT

### Technical Specifications

#### Screen

Screen Size	32" 43" 49" 55"
Resolution	32" 1920X1080 43" 49" 55" 4K
Brightness	450 cd/m2
Aspect Ratio	16:9
Response Time	8ms

#### Transparent Mirror

Thickness	4 mm
Dimensions	100 mm bezel in each side

#### PC

Intel i5 - 8 GB - 120 GB SSD - Windows 10 Pro
---

#### Touch

Touch Technology	PCAP - Projected Capacitive
Touch Points	Multi Touch
Response Time	8 ms
OS	Windows, Linux
Protection Glass	Tempered Anti Glare
Touch interface	USB
Touch method	finger, stylus, glove (latex)

#### Other

Application Type	Standalone
Cabinet Material	Metal
Application Area	Indoor



Interactive Touch Table

# ZENTA



Electrical lifting system with remote control

## HEIGHT ADJUSTMENT



With height adjustment feature, create collaborative experiences, add value to any environment, bringing technology to the user or presenter. It is also suitable for disable people.

### Main features

- Projected capacitive (PCAP) 10-point multi-touch
- Height adjustment electrical lifting column
- Power & data feed from rear panel or floor through the base plate
- Anti-Glare protection glass over the screen
- Ergonomic and compact structure
- User friendly, easy for maintenance



### Touch technology - Capacitive

The Projective Capacitive (PCAP) touch technology with 12 touch points ensures a seamless and accurate touch response. With its AMVA3 LED panel, it offers exceptional colour performance, high contrast and wide viewing angles.

This technology uses a sensor-grid of micro-fine wires integrated into the glass that covers the screen. Touch is detected because electrical characteristics of the sensor grid change when human finger is placed on the glass. Thanks to the glass overlay this technology is highly durable, and the touch function remains unaffected even if the glass is scratched.

It offers perfect picture performance and will work with human finger (also latex gloved) and stylus-pen.



### Smart Design

The sleek look is achieved with a striking aluminium surround and edge-to-edge vandal proof tempered glass front panel



### Plug and Play

If there is no internet access available the screen can still be updated thanks to their backup USB update option.



### 24/7 Commercial Use

A commercial grade panel, with a lifespan of 50,000 hours and high quality compenets ensure that this display can be in constant use 24/7.



Screen Size	32"	43"	49"	55"	65"
Model Number	M32ZN	M43ZN	M49ZN	M55ZN	M65ZN

### Technical Specifications

#### Screen

Screen Size	32" 43" 49" 55" 65"
Resolution	32" 43" 1920x1080 - 49" 55" 65" 4K
Brightness	450 cd/m2
Aspect Ratio	16:9
Contrast Ratio	5000:1
Viewing Angle	178:178
Response Time	8ms

#### Touch

Touch Technology	PCAP - Projected Capacitive
Touch Points	Multi Touch
Response Time	8 ms

#### Height Adjustment Lifting Column

Movement	Vertical (Up/Down)
Control	By Buttons (Up/Down)
Speed	Max speed: 38 mm/s
Lifting strength	700N
Locking System	Automatic Locking when engine not working
Engine Type	Electrical
Remote control	Available

#### Other

Application	indoor
Colour	RAL 7047 Grey (optional)
Installation	Floor bolting / Free Standing

## Height Adjustable Interactive Touch Table

# PETRA



Interactive Touch Table

Create collaborative experiences, add value to any environment, bringing technology to the user or presenter.

### Main features

- Projected capacitive (PCAP) 10-point multi-touch
- Anti-Glare protection glass over the screen
- Ergonomic and compact structure
- User friendly, easy for maintenance
- High-end Design and Finish



### Touch technology - Capacitive

The Projective Capacitive (PCAP) touch technology with 12 touch points ensures a seamless and accurate touch response. With its AMVA3 LED panel, it offers exceptional colour performance, high contrast and wide viewing angles.

This technology uses a sensor-grid of micro-fine wires integrated into the glass that covers the screen. Touch is detected because electrical characteristics of the sensor grid change when human finger is placed on the glass. Thanks to the glass overlay this technology is highly durable, and the touch function remains unaffected even if the glass is scratched.

It offers perfect picture performance and will work with human finger (also latex gloved) and stylus-pen.



### Smart Design

The sleek look is achieved with a striking aluminium surround and edge-to-edge vandal proof tempered glass front panel



### Plug and Play

If there is no internet access available the screen can still be updated thanks to their backup USB update option.



### 24/7 Commercial Use

A commercial grade panel, with a lifespan of 50.000 hours and high quality compenets ensure that this display can be in constant use 24/7.



Screen Size	32"	43"	49"	55"	65"
Model Number	M32PE	M43PE	M49PE	M55PE	M65PE

### Technical Specifications

#### Screen

Screen Size	32" 43" 49" 55" 65"
Resolution	32" 43" 1920x1080 - 49" 55" 65" 4K
Brightness	450 cd/m2
Aspect Ratio	16:9
Contrast Ratio	5000:1
Viewing Angle	178:178
Response Time	8ms

#### Touch

Touch Technology	PCAP - Projected Capacitive
Touch Points	Multi Touch
Responce Time	8 ms
OS	Windows, Linux
Protection Glass	Tempered Anti Glare
Touch interface	USB
Touch method	finger, stylus, glove (latex)

#### Other

Application	Indoor
Colour	RAL 7047 Grey (optional)
Installation	Floor bolting / Free Standing
Enclosure	Metal
Working temperature	0°C~50°C
Power supply	AC 100-240V 50/60HZ



## Multimedia Kiosk

# STELLA & FLORA



Reliable, affordable and easy to use digital interactive kiosk solution

## Application Area

- Education
- Restaurants
- Supermarkets
- Real Estate
- Healthcare
- Retail
- Hotel / Leisur



### Touch technology - Capacitive

The Projective Capacitive (PCAP) touch technology with 12 touch points ensures a seamless and accurate touch response. With its AMVA3 LED panel, it offers exceptional colour performance, high contrast and wide viewing angles.



### Plug and Play

If there is no internet access available the screen can still be updated thanks to their backup USB update option.



### 24/7 Commercial Use

A commercial grade panel, with a lifespan of 50.000 hours and high quality compenets ensure that thisdisplay can be in constant use 24/7.



## Technical Specifications

Screen Size	17"	19"	22"	22"	24"
Flora Model Number	K17F	K19F	K22F	K22FV	K24F
Stella Model Number	K17S	K19S	K22S	K22SV	K24S
Screen Orientation	Horizontal	Horizontal	Horizontal	Vertical	Horizontal
Resolution	1280 X 1024	1280 X 1024	1920 x 1080	1920 x 1080	1920 x 1080
Panel Type	TN LED	IPS LED	AMVA + LED	AMVA + LED	AMVA + LED
Brightness	250 cd/m2				
Aspect Ratio	5:4	5:4	16:9	16:9	16:9

### PC

Intel i3 - 4 GB - 120 GB SSD - Free Dos

### Touch

Touch Technology	PCAP - Projected Capacitive
Touch Points	Multi Touch
Response Time	8 ms
Touch Points	USB
Response Time	finger, stylus, glove (latex)

### Other

Cabinet Type	Standalone
Protection Grass	4 mm tempered protection glass
Applications	Indoor

### Optional Feaures

Metal Keyboard	✓	✓	✓	✓	✓	✓
Thermal Printer 80 mm	✓	✓	✓	✓	✓	✓
QR code reader	✓	✓	✓	✓	✓	✓
Windows 10 Pro OS	✓	✓	✓	✓	✓	✓

## Multimedia Kiosk



## Hand Sanitizer Digital Signage Kiosk

# ELORA

7/24  
COMMERCIAL GRADE  
SIGNAGE SCREEN

CONTENT MANAGEMENT  
SOFTWARE

NON-CONTACT

3000ml  
CAPACITY



## Wall Mount Hand Sanitizer Kiosk

Display the advertising contents in image or video file and automatically dispense the Sanitizer or Liquid Soap at the same time.

### Main features

- 3000ml Container Auto Hand Sanitizer Dispenser
- Integrated Signage Media Player
- Content Management Software
- Built in WIFI
- 7/24 Commercial Grade - Indoor
- Smart Design



#### Smart Design

The sleek look is achieved with a striking aluminium surround and edge-to-edge vandal proof tempered glass front panel



#### Integrated Signage Media Player powered by Samsung MagicInfo S4 Tizen



#### Built in Wi-Fi

Connect the screen to the CMS wirelessly via the integrated Wi-Fi, ethernet or by LAN



#### Plug and Play

If there is no internet access available the screen can still be updated thanks to their backup USB update option.



#### 24/7 Commercial Use

A commercial grade panel, with a lifespan of 50,000 hours and high quality components ensure that this display can be in constant use 24/7.



### Technical Specifications

#### Screen

Screen Size	32" DZ32W
Resolution	1920x1080
Brightness	450 cd/m2
Aspect Ratio	16:9
Contrast Ratio	5000:1
Viewing Angle	178:178
Response Time	8ms

#### Disinfection Machine Configuration

Capacity	3000 ml
Nozzle type	Automatic Liquid induction

#### Signage Media Player

Player	Built-in MagicInfo S6, SSSP 6.0
Processor	Coretex A72 1.7GHz Quad-Core CPU
Memory	2.5GB LPDDR4 1.5GHz 64bit
Operating System	Tizen 4.0 (VDLinux)

#### Other

Application	indoor
Screen Protection Glass	4 mm extra clear, tempered
Colour	White
Installation	Wall mount
Enclosure	Metal
Working temperature	0°C~50°C

# KLERA

7/24  
COMMERCIAL GRADE  
SIGNAGE SCREEN

CONTENT MANAGEMENT  
SOFTWARE

NON-CONTACT

3000ml  
CAPACITY



## Standalone Hand Sanitizer Kiosk

Comparing to the traditional Digital Signage, this smart device can catch more target audience.

The automatic dispenser can dispense the hand sanitizer or liquid hand soap without touch to avoid any cross-infection.

### Main features

- 3000ml Container Auto Hand Sanitizer Dispenser
- Integrated Signage Media Player
- Content Management Software
- Built in WIFI
- 7/24 Commercial Grade - Indoor
- Smart Design



#### Smart Design

The sleek look is achieved with a striking aluminium surround and edge-to-edge vandal proof tempered glass front panel



#### Integrated Signage Media Player powered by Samsung MagicInfo S4 Tizen



#### Built in Wi-Fi

Connect the screen to the CMS wirelessly via the integrated Wi-Fi, ethernet or by LAN



#### Plug and Play

If there is no internet access available the screen can still be updated thanks to their backup USB update option.



#### 24/7 Commercial Use

A commercial grade panel, with a lifespan of 50,000 hours and high quality components ensure that this display can be in constant use 24/7.



### Technical Specifications

#### Screen

Screen Size	32" DZ32K
Resolution	1920x1080
Brightness	450 cd/m2
Aspect Ratio	16:9
Contrast Ratio	5000:1
Viewing Angle	178:178
Response Time	8ms

#### Disinfection Machine Configuration

Capacity	3000 ml
Nozzle type	Automatic Liquid induction

#### Signage Media Player

Player	Built-in MagicInfo S6, SSSP 6.0
Processor	Coretex A72 1.7GHz Quad-Core CPU
Memory	2.5GB LPDDR4 1.5GHz 64bit
Operating System	Tizen 4.0 (VDLinux)

#### Other

Application	indoor
Screen Protection Glass	4 mm extra clear, tempered
Colour	White
Installation	Standalone / Free Standing
Enclosure	Metal
Working temperature	0°C~50°C



Temas Technology Co.Ltd.  
Esensehir Mahallesi, Basari Sokak, No: 14\1 Yukari Dudullu  
Umraniye - Istanbul - TURKEY  
Tel +90 216 314 54 54 - Fax +90 216394 44 98  
info@temasteknoloji.com.tr - www.temasteknoloji.com.tr